



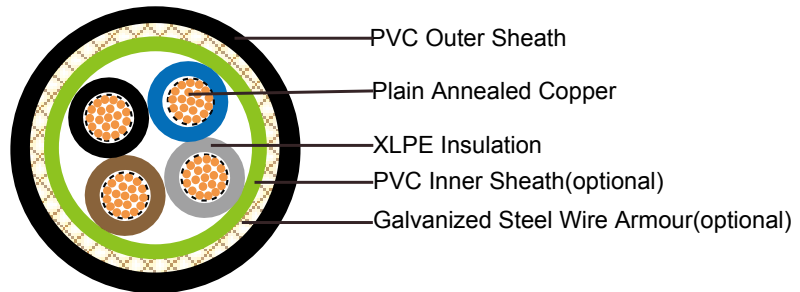

### 300/500V XLPE Insulated, PVC Sheathed Power Cables (2-4 Cores)

**FGD200 05RV-R (CU/XLPE/PVC 300/500V Class 2)**

**FGD200 05RVMV-R (CU/XLPE/PVC/SWA/PVC 300/500V Class 2)**

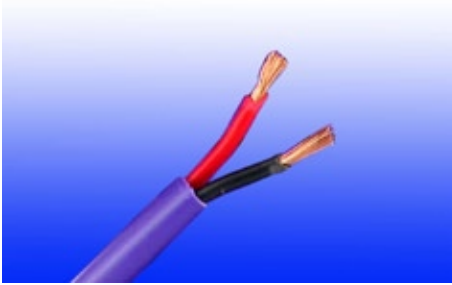

### APPLICATION

The cables are mainly used in power stations, mass transit underground passenger systems, airports, petrochemical plants, hotels, hospitals, and high-rise buildings.

### STANDARDS

Basic design adapted to IEC 60502-1; BS 5467

### FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)**	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1 ; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)**	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4

Note: Asterisk \*\* denotes that the standard compliance is optional, depending on the oxygen index of the PVC compound and the cable design.

### VOLTAGE RATING

300/500V

### CABLE CONSTRUCTION

**Conductor:** Plain annealed copper wire, stranded according to IEC(EN) 60228 class 2.

**Insulation:** Extruded cross-linked XLPE compound.

**Inner Sheath (optional):** PVC Compound

**Armouring (optional):** Galvanized Steel Wire

**Outer Sheath:** Thermoplastic PVC compound. UV resistance, hydrocarbon resistance, oil resistance, anti rodent and anti termite properties can be offered as option. Compliance to fire performance

standard (IEC 60332-1, IEC 60332-3, UL 1581, UL 1666 etc) depends on the oxygen index of the PVC compound and the overall cable design. LSPVC can also be provided upon request.

## COLOUR CODE

### Insulation Colour as per BS7671

	With Earth Conductor	Without Earth Conductor
2Cores	-	Brown, Blue
3Cores	Yellow/Green, Brown, Blue	Brown, Gray, Black
4Cores	Yellow/Green, Brown, Gray, Black	Brown, Gray, Black, Blue
5Cores	Yellow/Green, Brown, Gray, Black, Blue	Brown, Gray, Black, Blue, Black
Above 5 Cores	Yellow/Green, Black Numbered	Black Numbered

**Sheath Colour:** Black (other colors upon request)

## PHYSICAL AND THERMAL PROPERTIES

**Temperature range during operation:** Max.90°C for XLPE  
250°C in short-circuit for 5secs max.

**Minimum bending radius:** 6 x Overall Diameter (unarmoured cable)  
10 x Overall Diameter (armoured cable)

## CONSTRUCTION PARAMETERS

Conductor			FGD200 05RV-R		FGD200 05RVMV-R			
No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Insulation Thickness	Unarmoured		Armoured			
			Nominal Overall Diameter	Approx. Weight	Diameter Under Armour	Armour Wire Diameter	Nominal Overall Diameter	Approx. Weight
Noxmm <sup>2</sup>	No./mm	mm	mm	kg/km	mm	mm	mm	kg/km
2x1.5	7/0.53	0.50	6.5	65	6.5	0.9	11.2	246
2x2.5	7/0.67	0.50	7.3	91	7.3	0.9	12.0	292
2x4	7/0.85	0.50	8.4	131	8.4	0.9	13.1	360
3x1.5	7/0.53	0.50	6.9	81	6.9	0.9	11.6	275
3x2.5	7/0.67	0.50	7.8	116	7.8	0.9	12.5	331
3x4	7/0.85	0.50	9.0	169	9.0	0.9	13.7	413
4x1.5	7/0.53	0.50	7.6	101	7.6	0.9	12.3	309
4x2.5	7/0.67	0.50	8.6	144	8.6	0.9	13.3	380
4x4	7/0.85	0.50	9.9	213	9.9	0.9	14.6	479

## ELECTRICAL PROPERTIES

**Conductor Operating Temperature :** 90°C

**Ambient Temperature :** 30°C



### FGD200 05RV-R

#### Current-Carrying Capacities (Amp)

Conductor cross-sectional area	Reference Method 4 (enclosed in conduit in thermally insulating wall etc)		Reference Method 3 (enclosed in conduit on a wall or in trunking etc)		Reference Method 1 (clipped direct)		Reference Method 11 (on a perforated cable tray, horizontal or vertical)		Reference Method 12 (free air)		
	2 cables, single-phase a.c. or d.c.	3 or 4 cables, 3-phase a.c.	2 cables, single-phase a.c. or d.c.	3 or 4 cables, 3-phase a.c.	2 cables, single-phase a.c. or d.c. flat and touching	3 or 4 cables, 3-phase a.c. flat and touching or trefoil	2 cables, single-phase a.c. or d.c. or flat and touching	3 or 4 cables, 3-phase a.c. flat and touching or trefoil	Horizontal flat spaced	Vertical flat spaced	Trefoil
1	2	3	4	5	6	7	8	9	10	11	12
mm <sup>2</sup>	A	A	A	A	A	A	A	A	A	A	A
1.5	18	17	22	19	25	23	-	-	-	-	-
2.5	24	23	30	26	34	31	-	-	-	-	-
4	33	30	40	35	46	41	-	-	-	-	-

#### Voltage Drop (Per Amp Per Meter)

Nominal Cross Section Area	2 cables d.c.	2 cables, single-phase a.c.		3 or 4 cables, 3-phase a.c.		
		Ref. Methods 3 and 4 (enclosed in conduit etc, in or on a wall)	Ref. Methods 1 and 11 (clipped direct or on trays touching)	Ref. Methods 3 and 4 (enclosed in conduit etc, in or on a wall)	Ref. Methods 1, 11 and 12 (in trefoil)	Ref. Methods 1 and 11 (Flat and touching)
1	2	3	4	5	6	7
mm <sup>2</sup>	mV/A/m	mV/A/m	mV/A/m	mV/A/m	mV/A/m	mV/A/m
1.5	31	31	27	27	27	27
2.5	19	19	16	16	16	16
4	33	12	10	10	10	10

### FGD200 05RVMV-R

#### Current-Carrying Capacities (Amp)

Conductor cross-sectional area	Reference Method 1 (clipped direct)		Reference Method 11 (on a perforated horizontal cable tray or Reference Method 13 [free air] )		In single-way ducts		Laid direct in ground	
	one 2-core cable single phase a.c. or d.c.	one 3-core or 4-core cable 3-phase a.c.	one 2-core cable single phase a.c. or d.c.	one 3-core or 4-core cable 3-phase a.c.	one 2-core cable single phase a.c. or d.c.	one 3-core or 4-core cable 3-phase a.c.	one 2-core cable single phase a.c. or d.c.	one 3-core or 4-core cable 3-phase a.c.
1	2	3	4	5	6	7	8	9
mm <sup>2</sup>	A	A	A	A	A	A	A	A
1.5	27	23	29	25	-	23	-	28
2.5	36	31	39	33	-	30	-	36
4	49	42	52	44	-	40	-	48

#### Voltage Drop (Per Amp Per Meter)

Nominal Cross Section Area	2 cables d.c.	2 cables, single-phase a.c.	3 or 4 cables, 3-phase a.c.	2 cables, single-phase a.c.	3 or 4 cables, 3-phase a.c.
				In ducts or in ground	In ducts or in ground
1	2	3	4	5	6
mm <sup>2</sup>	mV/A/m	mV/A/m	mV/A/m	mV/A/m	mV/A/m
1.5	31	31	27	31	25
2.5	19	19	16	19	15
4	12	12	10	12	9.7



Rated Voltage



Standard



Standard



Flame Retardancy\*\*  
NF C32-070-2.1(C2)  
IEC60332-1-2/EN50265-2-1



Reduced Fire Propagation\*\*  
NF C32-070-2.2(C1)  
IEC60332-3-24/EN50266-2-4